



iTouch Surface Acoustic Wave


The New Benchmark for Surface Acoustic Wave Technology

With more than 20 years of IntelliTouch technical and manufacturing expertise, Elo Touch Solutions has once again raised the standards for surface acoustic wave (SAW) touch solutions with the introduction of iTouch technology. A proprietary innovation, iTouch technology moves all of the touch detection hardware to the backside of the touchscreen. The result is a completely flat touch surface with no bezel after integration of the touchscreen into a monitor. iTouch technology delivers the same robust performance customers expect from IntelliTouch: no known physical wear-out mechanism, fast touch response, drift-free performance using a finger, gloved hand, or soft stylus, and compatibility with existing controllers and software drivers.

iTouch touchscreens are the perfect solution for applications requiring impeccable touch performance without compromising aesthetics.

Applications

- Desktop touchcomputers, All-in-One (AiO) and touchmonitors
- Point-of-information kiosks
- Vending and ticket sales
- Gaming, lottery, and amusement
- Multimedia marketing
- Banking and financial transactions
- Industrial control rooms

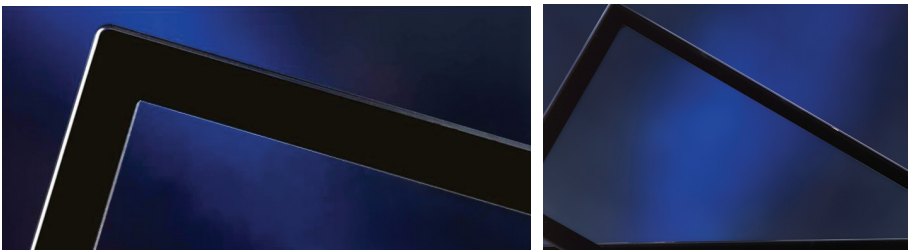

Features

- Proprietary iTouch technology developed by Elo Touch Solutions
- Available in standard and wide format, up to 32" diagonal
- Pure glass construction

Benefits

- Completely flat touchscreen offers sleek, refined appearance
- No bezel required for easy integration into touchmonitors and touch computers
- Same fast, accurate, and stable performance as IntelliTouch technology
- Compatible with standard 2701 controller series used with IntelliTouch technology
- 2-year limited warranty

About Elo

Elo founders pioneered the touch screen over 40 years ago. Today, Elo Touch Solutions is a leading global supplier of touch-enabled technology, products and industry solutions. The Elo portfolio encompasses the broadest selection of OEM touchscreen components, touchmonitors, and all-in-one touchcomputers for the demanding requirements of diverse markets, including gaming machines, hospitality systems, industrial automation, interactive kiosks, healthcare, office equipment, point of sale terminals, retail displays, and transportation applications. The Elo touch experience has consistently stood for quality, reliability and innovation with over 20 million installations worldwide.

iTouch Surface Acoustic Wave Specifications

Mechanical	
Input Method	Finger or gloved hand (cloth, leather, or rubber) activation, or soft stylus
Available Sizes*	7" to 32" diagonal; visit our website for full specifications and other product offerings
Electrical	
Positional Accuracy	Standard deviation of error is not greater than 2.5mm and typically much less with calibration to display image
Resolution	Touchpoint density is based on controller resolution of 4096 x 4096 and physical screen dimensions
Touch Activation Force	2 to 3 ounces (55 to 85 grams) typical
Controller	Board: Serial (RS232) or USB
Optical	
Light Transmission	Up to 92% per ASTM D1003
Surface Finish	Clear finish
Environmental	
Temperature	Operating: -4° to 122°F (-20°C to 50°C) Storage: -40° to 160°F (-40°C to 71°C)
Relative Humidity	Operating: 40°C at 90% RH, noncondensing
Altitude	Operating: 10,000 ft (3,048m) Storage/transport: 50,000 ft (15,240m)
Chemical Resistance	The touch active area of the touchscreen is resistant to chemicals that do not affect glass, such as: acetone, toluene, methyl ethyl ketone, isopropyl alcohol, methyl alcohol, ethyl acetate, ammonia based glass cleaners, gasoline, kerosene, vinegar
Electrostatic Protection	Per EN 61000-4-2, 1995 meets Level 4 (15kV air/ 8kV contact discharges)
Agency Approvals	UL, cUL, TÜV, CE, FCC Class A
Sealability	Touchscreen can be sealed to protect against splashed liquids, dirt, and dust
Durability	
Surface Durability	Surface durability is that of glass, Mohs' hardness rating of 6.5
Expected Life	No known wear-out mechanism, as there are no layers, coatings, or moving parts. iTouch technology has been operationally tested to more than 50 million touches in one location without failure, using a stylus similar to a finger.
Warranty	Touchscreen: 2-year limited warranty Controller: 2-year limited warranty

*Available in most standard sizes. See the touchscreen component drawing for details.

To find out more about our extensive range of Elo touch solutions, go to www.elotouch.com, or call the office nearest you.

North America

Elo Touch Solutions
1033 McCarthy Boulevard
Milpitas, CA 95035

800-ELO-TOUCH

Tel +1 408 597 8000

Fax +1 408 597 8001

customerservice@elotouch.com

Europe

Tel +32 (0)16 70 45 00

Fax +32 (0)16 70 45 49

elosales@elotouch.com

Asia-Pacific

Tel +86 (21) 3329 1385

Fax +86 (21) 3329 1400

www.elotouch.com.cn

Latin America

Tel 786-923-0251

Fax 305-931-0124

www.elotouch.com

Elo Touch Solutions, Inc. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. Elo (logo) and Elo Touch Solutions are trademarks of Elo Touch Solutions, Inc. Copyright 2014 Elo Touch Solutions, Inc. All rights reserved. DS000046, rev A 03/14

